

## GENERAL SPECIFICATIONS

MODELS	E48-200 Plus	E54-220 Plus	E60-220 Plus	E66-220 Plus	E72-240 Plus	E78-250 Plus	E86-280 Plus	E94-280 Plus	E100-310 Plus	E108-310 Plus	E68-220INV
Recommended horsepower (HP PTO)	16 @ 40*	16 @ 40*	18 @ 40*	25 @ 40	25 @ 40	35 @ 70**	50 @ 80	50 @ 80	75 @ 125	75 @ 125	25 @ 40
Cutting width	48"	54"	60"	66"	72"	78"	86"	94"	100"	108"	68"
Cutting height	26"	28"	28"	28"	30"	31"	36"	36"	38 1/2"	38 1/2"	26 1/4"
Impeller RPM	540	540	540	540	540	540	540	540	540	540	540
Impeller diameter	20"	22"	22"	22"	24"	25"	28"	28"	31"	31"	22"
Impeller shaft diameter	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 9/16"	1 9/16"	1 9/16"	2"	2"	1 1/4"
Impeller depth	7"	7"	8"	8"	8 1/2"	9"	11"	11"	12"	12"	8"
Impeller center height	13 1/2"	14 1/2"	14 1/2"	14 1/2"	15 1/2"	16"	18"	18"	20"	20"	14 1/2"
Balanced impeller	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Number of blades	4	4	4	4	4	4	4	4	5	5	4
Main auger diameter	17"	17"	17"	17"	17"	17"	20"	20"	23"	23"	15"
Balanced auger	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Chute rotation on polyethylene	Manual	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
	Hydraulic motor (gear)	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Chute 1 or 2 deflectors (Option)	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	1
Manual deflector	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Hydraulic deflector	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Reversible carbon steel blade	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std bolted
Adjustable skid shoes	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Storage foot	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	-
P.T.O shaft number	T20	T20	T20	T40	T40	T40	T60	T60	T80	T80	T40 long
Driving chain number	50	50	60	60	60	60	60	60	80	80	60
Number of safety bolts	2	2	2	2	2	2	2	2	3	3	2
Hitch category (QH = quick hitch)	1	1	1	1	1	1	2	2	2	2	1, QH
Approx. weight (lb)	373	413	490	522	548	610	970	994	1484	1525	595

\* Use with a P.T.O. shaft T40 if more than 30 HP

\*\* Use with a P.T.O. shaft T60 if more than 40 HP

The weight does not include chute and accessories. Specifications are subject to change without notice

### WARRANTY

Every product manufactured by Normand Co. Ltd is guaranteed against manufacturing and raw material defects (excluding the P.T.O. shafts, gearboxes, engines, hydraulic motors, hydraulic cylinders, telescopic cylinders, tires, hubs and wheels, which are covered by the manufacturer warranty) for a full year from the date of purchase, provided that the product has not been modified or abused in any way. This warranty does not cover accidents or breaks caused by objects other than snow (metal bits, concrete, wood, asphalt, tires, etc.). Also blades, skid shoes, soles of skid shoes, driving chains and tires wear is not covered by the warranty. We will replace or repair any defective part at no cost if they are returned prepaid at our plant in Saint-Pascal (Kamouraska, Québec, Canada). Our obligations are limited to the replacement and/or repair of the defective part.



HITCH YOUR TRACTOR TO HIGH PERFORMANCE



**Normand Co. Ltd**  
340, Tache Street  
Saint-Pascal (Quebec) Canada G0L 3Y0

T : 418 492-2712  
1 888 666-7626  
F : 418 492-9363

E-mail : normand@cienormand.com  
www.cienormand.com  
www.facebook.com/cienormand



DEALER

© Normand® Co. Ltd 2017 All Rights Reserved

Printed Canada © 2017 Em-Communication Inc. 819-472-8249

SNOWBLOWERS  
**ECQNQR<sup>plus</sup> SERIES**

STURDY CONSTRUCTION BASED ON NORMAND COMMERCIAL GRADE SNOWBLOWER

E86-280P<sup>LUS</sup>  
E94-280P<sup>LUS</sup>



SAFETY BOLT ON DRIVING SHAFT AND CHAIN BENDER



HYDRAULIC CHUTE ROTATION BY MOTOR WITH CUSHION VALVE (OPTION)



ADJUSTABLE CARBON STEEL ANGLE SKID SHOES



E100-310P<sup>LUS</sup>  
E108-310P<sup>LUS</sup>

STANDARD REVERSIBLE CARBON STEEL BLADE



E72-240P<sup>LUS</sup>

BALANCED AUGER AND FAN



STORAGE FOOT



E78-250P<sup>LUS</sup>

WELL FINISHED CONSTRUCTION AND FULL-LENGTH WELDING



E48-200P<sup>LUS</sup>

QUALITY PAINT WITH EPOXY PRIMER



GAP ROD FOR DEFLECTOR ADJUSTMENT (STANDARD)




CHUTE ROTATION ON POLYETHYLENE UHMW



E68-220INV

HYDRAULIC CYLINDER FOR DEFLECTOR ADJUSTMENT (OPTION)

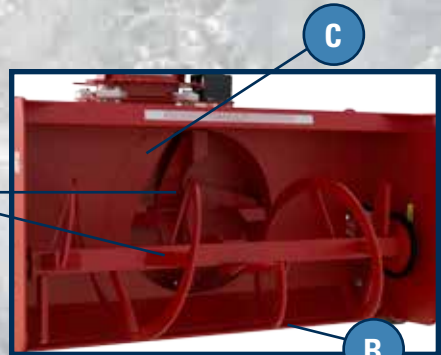

- A** STURDY, FACTORY-BALANCED AUGER AND FAN
- B** REVERSIBLE CARBON STEEL BLADE
- C** FLOW CORRECTOR ALLOWING INCREASED SNOW FLOW

E54-220P<sup>LUS</sup>  
E60-220P<sup>LUS</sup>  
E66-220P<sup>LUS</sup>