

HYBRID SERIES

Snowblowers



	N60-240HYB	N74-250HYB	N82-260HYB N82-260HYB-EXT32	N92-280HYB N92-280HYB-EXT36	N100-310HYB N100-310HYB-EXT40
RECOMMENDED HORSEPOWER (HP PTO)	20 to 40	25 to 50	40 to 75	60 to 90	85 to 140
CUTTING WIDTH	60"	74"	82"	92"	100"
EXTENSIBLE PANEL	-	-	- / 32"	- / 36"	- / 40"
CUTTING HEIGHT	28"	29"	30 ¾"	33"	35 ¾"
IMPELLER RPM	540	540	540	540	540
IMPELLER DIAMETER	24"	25"	26"	28 ½"	31"
IMPELLER DEPTH	7 ½"	9"	11"	12"	14 ¼"
NUMBER OF BLADES	4	4	4	4	5
IMPELLER SHAFT DIAMETER	1 ¼"	1 9/16"	1 9/16"	1 9/16"	2"
BALANCED IMPELLER	Std	Std	Std	Std	Std
DRUM CENTER HEIGHT	20 ¼"	21 ½"	22 ½"	24 ¼"	26 ½"
CHUTE ROTATION BY HYDRAULIC MOTOR	Std.	Std.	Std.	Std	Std
HYDRAULIC DEFLECTOR	Std.	Std.	Std.	Std	Std
MANUAL DEFLECTOR	Opt.	Opt.	Opt.	Opt.	Opt.
CYLINDER FOR CHUTE DEFLECTOR	2" X 4"	2" X 4"	2" X 6"	2 ½" X 8"	2 ½" X 8"
SEMI-INDUSTRIAL CHUTE (2 DEFLECTORS)	Std	Std	Std	Std	Std
AUGER DIAMETER	14"	15"	16"	17"	18"
BALANCED AUGER	Std	Std	Std	Std	Std
REVERSIBLE CARBON STEEL CUTTING EDGE	Std	Std	Std	Std	Std
REVERSIBLE HARDOX 450 STEEL CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
REVERSIBLE STAINLESS STEEL CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
TIVAR CUTTING EDGE	Opt.	Opt.	Opt.	Opt.	Opt.
LIVE EDGE CUTTING EDGE	-	Opt.	Opt.	Opt.	Opt.
MOBILE LATERAL SKID SHOES	Std	Std	Std	Std	Std
STORAGE STAND	Std	Std	Std	Std	Std
HOSE HOLDER	Std	Std	Std	Std	Std
DRIVE CHAIN NUMBER	60	60	80	80	100
CHAIN GUARD	Std	Std	Std	Std	Std
NUMBER OF SAFETY BOLTS	2	2	2	3	3
KEY FOR DRIVE SHAFT ADJUSTMENT	Std	Std	Std	Std	Std
DUCTILE IRON BEARING CASING	Std	Std	Std	Std	Std
STD PTO SHAFT	T20	T40	T60	T60	T80
HITCH CATEGORY (QH = QUICK HITCH)	1, 1 QH	1, 1 QH	1, 1 QH, 2	2 QH	2 QH
APPROX WEIGHT (LB)	860	1 063	1 265/1 570	1 709/1 935	2 256/2 450

* The weight includes the chute, the cylinder for chute deflector, the rotation kit and the PTO shaft.
Specifications are subject to change without notice.

© Normand Company Ltd. All rights reserved 2025

HYBRID SERIES

Snowblowers



THE MOST PERFORMING AND ROBUST SNOWBLOWER IN ITS CATEGORY!





Normand Co. Ltd

cienormand.com





340 Tache Street
Saint-Pascal (QC) Canada G0L 3Y0
418 492-2712 • 1 888 666-7626
normand@cienormand.com

N60-240HYB | N74-250HYB | N82-260HYB | N92-280HYB | N100-310HYB

HYBRID SERIES



N60-240HYB



N74-250HYB



N82-260HYB



N82-260HYB-EXT32



Live Edge Cutting Edge

Available on all models, except for N60-240HYB.

- Carbon steel
- **HARDOX** 450
- Stainless steel



Compactor

Hydraulic leveler (scraper) that raises the snowblower up to 3 15/16 inches and compacts the snow, for use on gravel driveways. Tivar can be used for unistone driveways.



The following components are made of **HARDOX** 450 steel:

- Structure
- Sides and reinforcements of sides
- Auger blades
- Triple bottom
- 3-points
- Lining behind the auger blades

HYBRID SERIES




N92-280HYB | N92-280HYB-EXT36



Mobile lateral skid shoes

Same material as the cutting edge.

- Carbon steel
- **HARDOX** 450
- Stainless steel
- Tivar

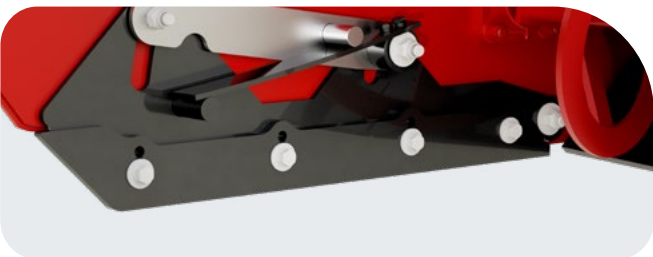

Full Live Edge

Live Edge on snowblower and extension. Available on N82-260HYB-EXT32 and N92-280HYB-EXT36.



N100-310HYB | N100-310HYB-EXT40



Reversible cutting edges:

- Carbon steel (Reversible)
- **HARDOX** 450 steel (Reversible)
- Stainless steel (Reversible)
- Tivar 88