

HYDRAULIC SERIES

Snowblowers



	N62-250HYD	N78-250HYD	N102-340HYD
CUTTING WIDTH	62"	78"	102"
CUTTING HEIGHT	30"	30"	47 1/2"
IMPELLER DIAMETER	25"	25"	34"
IMPELLER DEPTH	9"	9"	12"
NUMBER OF BLADES	4	4	6
IMPELLER SHAFT DIAMETER	1 9/16"	1 9/16"	2"
BALANCED IMPELLER	Std	Std	Std
CHUTE ROTATION BY HYDRAULIC MOTOR	Std	Std	Std
HYDRAULIC DEFLECTOR	Std	Std	Std
SEMI INDUSTRIAL CHUTE	Std	Std	Opt.
HYDRAULIC TELESCOPIC CHUTE	-	-	Std
AUGER DIAMETER	16"	16"	23"
BALANCED AUGER	Std	Std	Std
REVERSIBLE CARBON STEEL CUTTING EDGE	Std	Std	Std
REVERSIBLE HARDOX 450 STEEL CUTTING EDGE	Opt.	Opt.	Opt.
REVERSIBLE STAINLESS STEEL CUTTING EDGE	Opt.	Opt.	Opt.
TIVAR CUTTING EDGE	Opt.	Opt.	Opt.
LATERAL CUTTING EDGE	-	-	Opt.
ADJUSTABLE CARBON STEEL SKID SHOES	Std	Std	Std
ADJUSTABLE HARDOX 450 STEEL SKID SHOES	Opt.	Opt.	Opt.
ADJUSTABLE STAINLESS STEEL SKID SHOES	Opt.	Opt.	Opt.
ADJUSTABLE TIVAR SKID SHOES	Opt.	Opt.	Opt.
DRIVE CHAIN	80 Oil bath	80 Oil bath	100 Oil bath
QUANTITY OF SAFETY BOLTS	-	-	2
DUCTILE IRON BEARING CASING	Std	Std	Std
HYDRAULIC DISTRIBUTION BLOCK CONTROLLING THE ROTATION OF THE IMPELLER AND AUGER, CHUTE ROTATION AND ACTION DEFLECTOR	Opt.	Opt.	Std
14 PIN CONNECTOR INCLUDING WIRING	Opt.	Opt.	-
ELECTRO-HYDRAULIC GROUP WITH REMOTE CONTROL FOR ACTIVATION OF AUXILIARY FUNCTIONS	-	-	Std
HITCH CATEGORY	Skid steer / Loader	Skid steer / Loader	As per loader type
APPROX. WEIGHT (LB)	1 300	1 450	3 950
REQUIRED LOADER CHARACTERISTICS			
HIGH FLOW MINIMUM	27 GPM to 3 000 PSI	27 GPM to 3 000 PSI	54 GPM to 3 500 PSI
AUXILIARY HYDRAULICS (2) FOR ROTATION AND DEFLECTOR	Required	Required	-
HYDROSTATIC TRANSMISSION	-	-	Required
24 VOLTS ELECTRIC SYSTEM	-	-	Required

* The weight includes the chute, the rotation kit, the hydraulic cylinder for chute deflector and the hydraulic motor.
Specifications are subject to change without notice.



Normand Co. Ltd
cienormand.com



340 Tache Street
Saint-Pascal (QC) Canada G0L 3Y0
418 492-2712 • 1 888 666-7626
normand@cienormand.com

HYDRAULIC SERIES

Snowblowers



INNOVATION - QUALITY - STURDINESS



SINCE 1857 DEPUIS

N62-250HYD | N78-250HYD | N102-340HYD

N62-250HYD | N78-250HYD



Chain in oil bath
(all models)


Backdrag
(scraper blade)



N62-250HYD
Without backdrag
(scraper blade)



Scraper blade
in down position
Raises the snowblower
up to 3 1/2 inches.

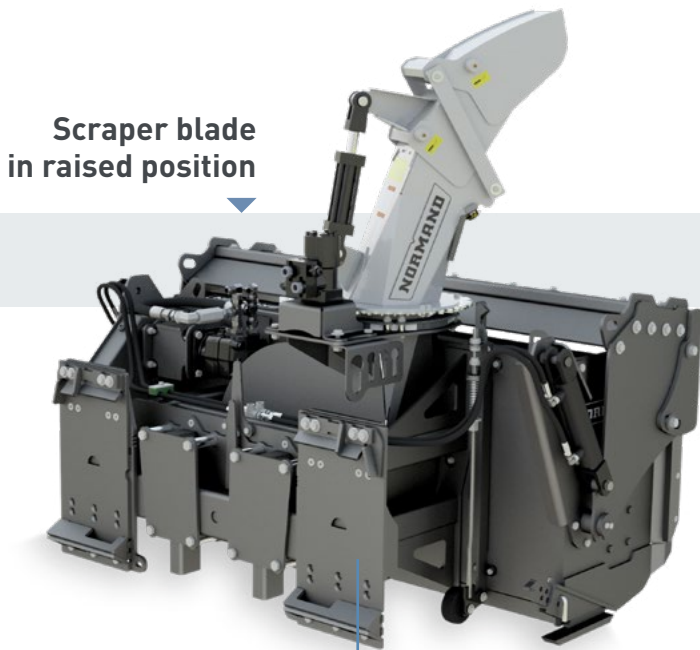


Scraper blade
in raised position

Skid steer
attachment shown


N62-250HYD | N78-250HYD

N102-340HYD

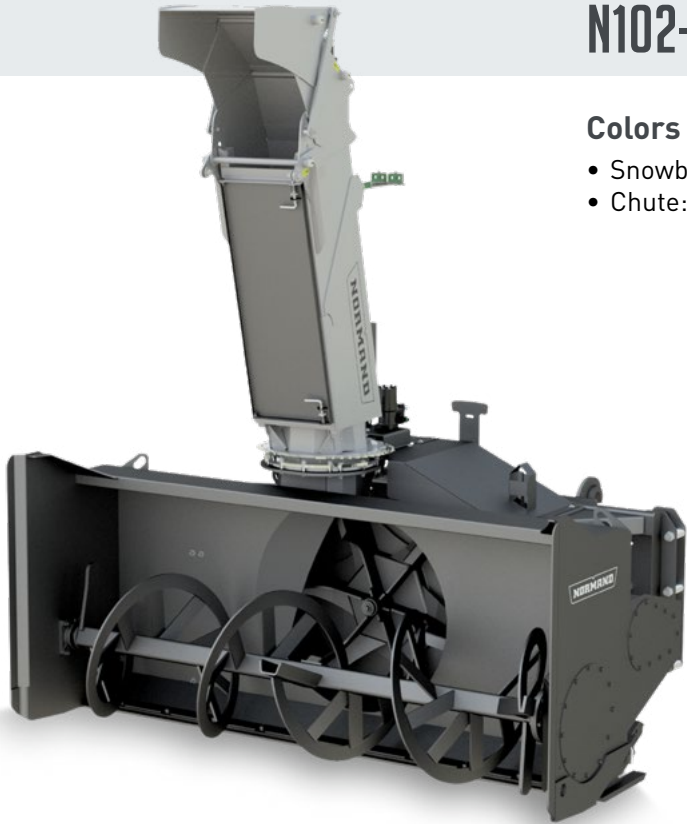


Colors (all models)
• Snowblower: husky grey
• Chute: silver

Telescopic chute
(standard)

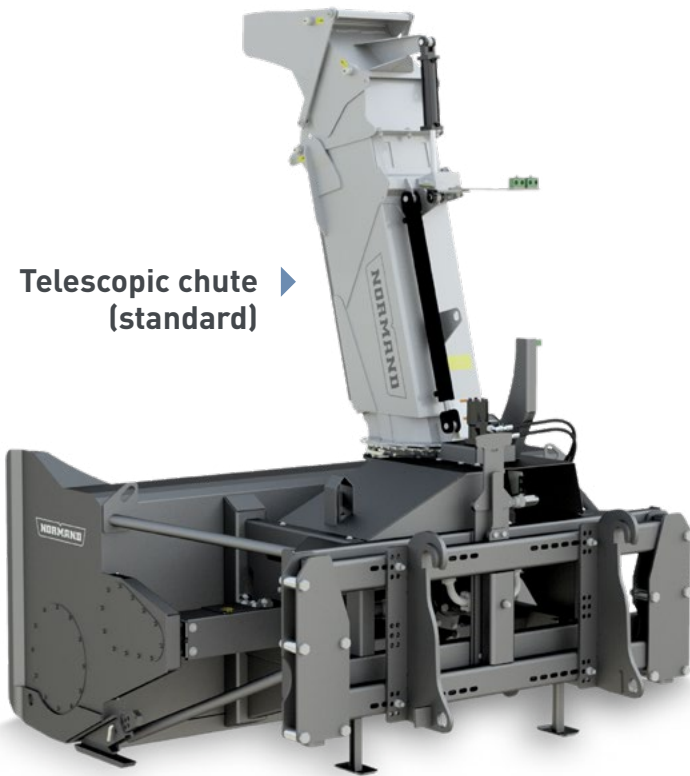

Slip hitch
Allows to follow surface
variations and increase efficiency.
(all models)

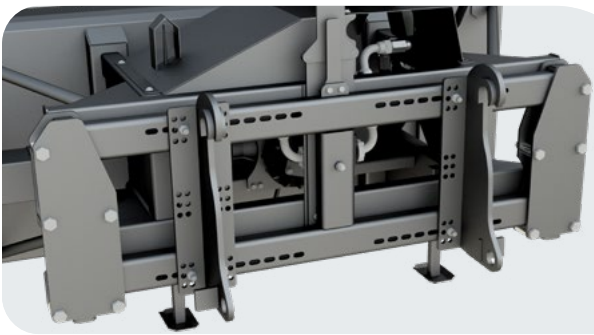

ADJUSTABLE SKID SHOES

- Carbon steel
- Stainless steel
- **HARDOX** 450
- Tivar 88



REVERSIBLE CUTTING EDGE

- Carbon steel (reversible)
- Stainless steel (reversible)
- **HARDOX** 450 (reversible)
- Tivar 88



N102-340HYD